

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 367 841 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
03.12.2003 Bulletin 2003/49

(51) Int Cl.7: H04Q 7/30

(21) Application number: 03011357.5

(22) Date of filing: 19.05.2003

(84) Designated Contracting States:  
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR  
HU IE IT LI LU MC NL PT RO SE SI SK TR  
Designated Extension States:  
AL LT LV MK

(72) Inventors:  
• Sakata, Masayuki  
Tokyo (JP)  
• Kojima, Masahiko  
Tokyo (JP)  
• Itaba, Naoto  
Tokyo (JP)

(30) Priority: 29.05.2002 JP 2002154889

(71) Applicant: NEC CORPORATION  
Tokyo (JP)


(74) Representative: Betten & Resch  
Patentanwälte,  
Theatinerstrasse 8  
80333 München (DE)

(54) Radio access network apparatus and mobile communication system using the same

(57) The radio access network for allowing to construct a system abundant in scalability in a W-CDMA mobile communication system. A RNC in the radio access network is physically separated into a C plane control equipment for controlling signaling and a U plane control equipment for processing user data, where the user data is transferred between a mobile terminal and a host device via only the U plane control equipment

and a control signal is terminated by the U plane control equipment and the C plane control equipment. This allows a system abundant in scalability to be constructed, and even in the case of soft handover across the C plane control equipments, also enables the continuous use of the same U plane control equipment, thereby eliminating the conventional connection path for connecting between RNCs and preventing delay due to passing through the RNCs.

FIG. 1

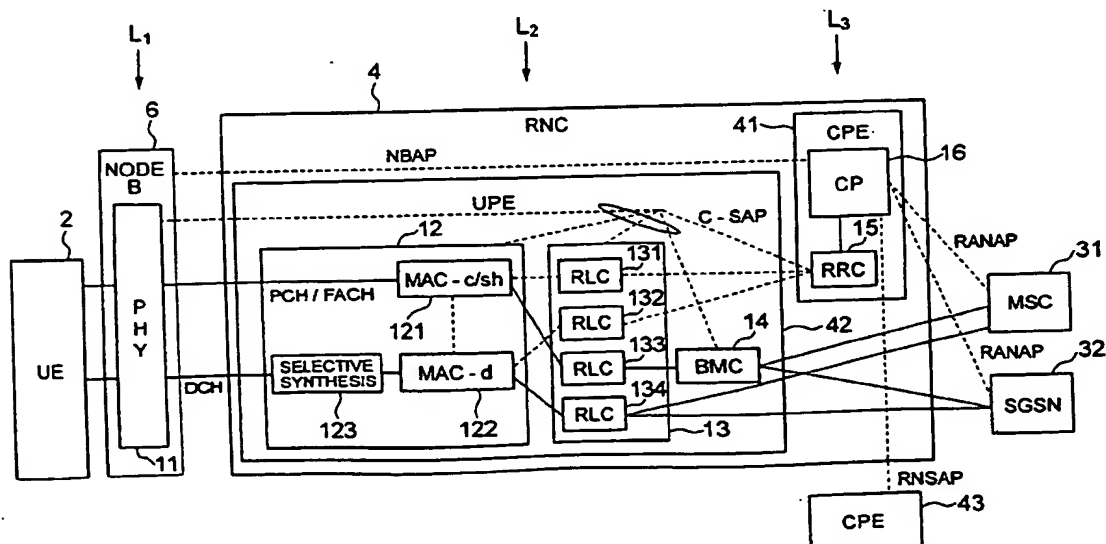

EP 1 367 841 A2

## Description

### BACKGROUND OF THE INVENTION

#### Field of the Invention

[0001] The present invention relates to a radio access network apparatus and a mobile communication system using it, and more particularly to an improvement of a Radio Network Controller (RNC) in a W-CDMA cellular mobile communication system.

#### Description of the Prior Art

[0002] An architecture of a W-CDMA communication system that is a mobile communication system is shown in FIG. 11. A radio access network (RAN) 1 is configured with radio network controllers (RNC) 4, 5 and Nodes B 6 to 9, and is connected with a core network (CN) 3 as an exchange network via an Iu interface. The Nodes B 6 to 9 are logical nodes for radio transmission/reception, and more specifically radio base station apparatus.

[0003] An interface between the Node B and RNC is referred to as Iub, and Iur interface is also standardized as an interface between RNCs. Each Node B covers one or more cells 10 and is connected to a mobile unit (UE) 2 via a radio interface. The Node B terminates a radio line, and the RNC manages the Node B and selectively synthesizes radio paths in the case of soft handover. Note here that the detail of the architecture shown in FIG. 11 is specified in 3GPP (3rd Generation Partnership Projects).

[0004] FIG. 12 shows a protocol architecture for the radio interface in the W-CDMA communication system shown in FIG. 11. As shown in FIG. 12, such protocol architecture is composed of three protocol layers of a physical layer (PHY) 11 denoted as L1, data link layers 12 to 14 denoted as L2, and a network layer (RRC: Radio Resource Control) 15 denoted as L3.

[0005] The data link layers L2 are separated into three sublayers of a MAC (Media Access Control) layer 12, a RLC (Radio Link Control) layer 13, and a BMC (Broadcast/Multicast Control) layer 14. The MAC layer 12 has a MAC-c/sh (common/share) 121 and a MAC-d (dedicated) 122, and the RLC layer 13 has a plurality of RLCs 131 to 134.

[0006] Ellipses in FIG. 12 indicate service access points (SAP) between layers or sublayers, where SAPs between the RLC sublayer 13 and the MAC sublayer 12 provide logical channels. That is, the logical channels are provided from the MAC sublayer 12 to the RLC sublayer 13, and are classified by functions and logical properties of transmission signals and characterized by transferred information contents.

[0007] The logical channels include a CCCH (Common Control Channel), a PCCH (Paging Control Channel), a BCCH (Broadcast Control Channel), and a CTCH (Common Traffic Channel), for example.

[0008] A SAP between the MAC sublayer 12 and the physical layer 11 provides transport channels, which are provided from the physical layer 11 to the MAC sublayer 12. The transport channels are classified by a transmission form and are characterized depending on how and what information is transmitted via a radio interface.

[0009] The transport channels include a PCH (Paging Channel), a DCH (Dedicated Channel), a BCH (Broadcast Channel), and a FACH (Forward Access Channel), for example.

[0010] The physical layer 11 and the sublayers 12 to 14 in the data link layer are controlled by the network layer (RRC) 15 via a C-SAP providing a control channel. The detail of the protocol architecture shown in FIG. 12 is specified in TR25.925 of 3GPP.

[0011] In addition, a C (Control) plane for signaling that transfers a control signal and a U (User) plane that transfers user data, are specified in TR 25.925. The BMC sublayer 14 in L2 is applied only to the U plane.

[0012] The RNCs 4, 5 of the radio access network (RAN) 1 in the prior art are apparatus in which both functions of controlling the C plane and U plane are physically integrated.

[0013] In a mobile communication system including such a RNC that integrally has the control functions of both U plane and C plane, the control function of the C plane is sufficient enough to be added in order to enhance the signaling processing capacity, however, the RNC itself is required to be added. Furthermore, although the control function of the U plane is sufficient enough to be added in order to increase the transfer speed of user data, the RNC itself is required to be added as well. Therefore, the conventional RNC constitution makes constructing a system abundant in scalability quite difficult.

[0014] Moreover, the following disadvantage arises in soft handover. When a UE (mobile unit) is in a usual set-up status, one Radio Link is connected between the RNC and Node B, and when the UE is moved and comes into a soft handover status, two or more paths are connected between the RNC and a plurality of Nodes B. When the UE comes into the soft handover across RNCs, a path is connected utilizing an interface referred to as Iur (see FIG. 11) between a serving RNC and a drift RNC.

[0015] In such a status of soft handover across RNCs, a path for user data may be connected from one U plane control function unit to a plurality of Nodes B involved in soft handover, however, another path for the user data needs to be connected between the serving RNC and the drift RNC, wasting resources and causing delay due to passing through the RNCs.

### BRIEF SUMMARY OF THE INVENTION

[0016] It is therefore an object to provide a radio access network apparatus capable of constructing a system abundant in scalability and a mobile communication

system using the same.

[0017] Another object of the present invention is to provide a radio access network apparatus which eliminates waste of resources and prevents delay in the case of soft handover, and a mobile communication system using the same.

[0018] According to the present invention, the radio access network apparatus is provided between a mobile terminal and a host device having an switching network in the mobile communication system and is connected with the mobile terminal via a radio interface. The radio access network apparatus comprises user plane controlling means for controlling transfer of user data in relation to the mobile terminal and control plane controlling means for controlling transfer of signaling having a control signal, both of which are physically separated from each other.

[0019] The user plane controlling means has a function of terminating a data link layer of a protocol for the radio interface, and the control plane controlling means has a function of terminating a network layer of a protocol for the radio interface. The user data is transferred between the mobile terminal and the host device via the data link layer of the user plane controlling means, and the signaling is transferred via the data link layer of the user plane controlling means and the network layer of the control plane controlling means.

[0020] Furthermore, the radio access network apparatus further comprises a radio base station having a function of terminating a physical layer of a protocol for the radio interface. The user plane controlling means further includes means for selecting data of high receiving quality from among the user data coming from a plurality of radio base stations involved in a soft handover state and sending out the selected data to the host device. Moreover, the user plane controlling means is incorporated into the radio base station. The mobile communication system belongs to a W-CDMA cellular system.

[0021] The mobile communication system according to the present invention includes the radio access network apparatus dedcribed above.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

FIG. 1 is a functional block diagram according to an embodiment of the present invention;  
FIG. 2 is a diagram illustrating advantages of the embodiment of the present invention;  
FIG. 3 is a diagram illustrating a status during soft handover when the embodiment of the present invention is employed;  
FIG. 4 is a diagram showing a path connection sequence in the case of soft handover according to the embodiment of the present invention;  
FIG. 5 is a diagram showing the existing (conven-

tional) network configuration and a flow of user data and control signals;

FIG. 6 is a diagram showing a network configuration of IP network employing the embodiment of the present invention;

FIG. 7 is a sequence diagram in the case that radio links are setup for a plurality of Nodes B at the same time according to the embodiment of the present invention;

FIG. 8 is a sequence diagram when the radio link is additionally setup for a new Node B according to the embodiment of the present invention;

FIG. 9 is a diagram showing one example of a flow of user data and control signals in the IP network according to the embodiment of the present invention;

FIG. 10 is a diagram showing another example of a flow of user data and control signals in the IP network according to the embodiment of the present invention;

FIG. 11 is a diagram showing a system architecture in a W-CDMA communication system; and  
FIG. 12 is a diagram showing the system architecture in FIG. 11 as a protocol architecture.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0023] The embodiments of the present invention will be described below with reference to the drawings. FIG. 1 is a functional block diagram of the embodiment according to the present invention, where the same parts as in FIG. 12 are indicated with the same reference numerals and characters. As shown in FIG. 1, a RNC 4 is physically separated into a C plane control equipment (CPE: Control Plane Equipment) 41 equivalent to a C plane for controlling signaling and a U plane control equipment (UPE: User Plane Equipment) 42 equivalent to a U plane for controlling user data.

[0024] All kinds of signaling between units are communicated directly with a central control processor (CP: Control Processor) 16 provided in the C plane control equipment 41. However, RRC signaling between a mobile unit (UE) 2 and the RNC 4 cannot be distinctly separated into the C plane and U plane, so is transferred to a RRC 15 in the C plane control equipment 41 after the U plane control equipment 42 terminates RLCs 131 and 132.

[0025] In this manner, layers in the existing protocol layer architecture of the RNC shown in FIG. 12 are separated into a Node B (radio base station apparatus) 6 for the physical layer (PHY) 11 denoted as L1, a U plane control equipment 42 for the data link layers 12 to 14 denoted as L2, and a C plane control equipment 41 for the network layer 15 and above denoted as L3.

[0026] The RRC 15 in the C plane control equipment 41 controls each unit for terminating the physical layer 11 in the Node B and a MAC layer 12, a RLC layer 13,

and a BMC layer 14 in the U plane control equipment 42, by means of C-SAPs (Control Service Access Point) providing control channels. Signaling NBAP between the Node B6 and the RNC 4, signaling RNSAP between the RNC 4 and a C plane control equipment (CPE) 43 in another RNC, and signaling RANAP between the RNC 4 and a MSC (Mobile Switching Center) 31 or an SGSN (Serving GPRS (Global Packet Radio Service) Switching Node) 32, are terminated and processed directly by the CP 16 in the C plane control equipment 41.

[0027] Note that the MSC 31 has a circuit switching function and that the SGSN 32 has a packet switching function, both of which are included in the core network (CN) 3 shown in FIG. 11.

[0028] The RRC signaling utilized between the RNC 4 and the mobile unit 2 is transferred from the mobile unit 2 via the Node B6 and the MAC layer 12 and RLC layer 13 in the U plane control equipment 42, and is terminated in the RRC layer 15 in the C plane control equipment 41. PCH/FACH is terminated in the MAC-c/sh layer 121 and the RLC layer 13 in the U plane control equipment 42 and is transmitted to the C plane control equipment 41, since the relation between the Node B6 and the U plane control equipment 42 is determined after Logical O&M procedure (Logical O&M is the signaling associated with the control of resources owned by the RNC but physically implemented in the Node B, and is specified in 3GPP Specification (25.401)) and is not changed as far as station data is not changed.

[0029] DCH (Dedicated Channel) for transmitting user data allows the connection between the arbitrary Node B and the U plane control equipment 42, and is terminated in the MAC-d layer 122 and the RLC layer 13 to be transmitted to the MSC 31 having a circuit switching function and the SGSN 32 having a packet switching function through the C plane control equipment 41, after paths between Nodes B are selectively synthesized in a selective synthesis unit 123 of the U plane control equipment 42.

[0030] The selective synthesis unit 123 selectively synthesizes DCHs from a plurality of Nodes B in the case of soft handover, and selects a link having the highest link quality (receiving quality) from among these Nodes B.

[0031] The apparatus configuration shown in FIG. 1 allows to construct a system abundant in scalability. That is, only the C plane control equipment 41 is added in order to enhance signaling processing capacity, and only the user plane control equipment 42 is added in order to increase user data transfer speed. Units in the user plane control equipment 42 have no relation with one another and are controlled by the RRC 15 in the C plane control equipment 41, which thus enables implementation thereof as a single unit.

[0032] FIG. 2 is a diagram showing scalability secured between the C plane control equipment (CPE) and the U plane control equipment (UPE) separated from each other according to the embodiment of the present inven-

tion. The C plane control equipments 41a to 41c and the U plane control equipments 42a to 42c are interconnected via a device 17 such as an IP router or a hub. The C plane control equipment and the U plane control equipment are conventionally integrated as a single RNC unit, therefore the RNC itself is required to be added for extension. However, the C plane control equipment, which performs signaling processing such as call processing, has the possibility of lacking processing capacity with increasing call quantity. In this case, by adding a new C plane control equipment, processing may easily be dispersed.

[0033] For example, in the case that two C plane control equipments 41a, 41b are utilized, an algorithm such that the C plane control equipment 41a is used when a mobile unit has the terminal number whose last one digit is an even number and the C plane control equipment 41b is used when a mobile unit has the terminal number whose last one digit is an odd number, is altered by utilizing three C plane control equipments 41a to 41c into another algorithm such that the C plane control equipment 41a is used when the last one digit of the terminal number is 0, 1, 2, or 3, the C plane control equipment 41b is used when the last one digit is 4, 5, or 6, and the C plane control equipment 41c is used when the last one digit is 7, 8, or 9. This allows easy enhancement of processing capacity by 1.5 times.

[0034] On the other hand, the U plane control equipment, which performs transfer of user data, has the possibility of lacking processing capacity with increasing quantity of transmitting/receiving data to/from each mobile unit. In this case, by adding a new U plane control equipment, processing may easily be dispersed. For example, the constitution of connecting three out of Nodes B6a to 6f in subordination to each of two U plane control equipments 42a, 42b is changed so as to connect two out of the Nodes B6a to 6f in subordination to each of three U plane control equipments 42a, 42b, and 42c, which allows an increase of the transfer speed by 1.5 times.

[0035] FIG. 3 is a diagram showing that the terminal UE 2 as a mobile unit is performing soft handover operation between the Node B6a and Node B6b. The DCH is connected to the terminal 2 from both the Nodes B6a and 6b. By selective synthesis in the selective synthesis unit 123 of the U plane control equipment 42a, a link having higher link quality is selected from the Nodes B6a and 6b for transmission to the host device.

[0036] FIG. 4 shows a sequence from the state that the terminal UE as a mobile unit is executing voice communication utilizing the Node B#1(6a) and the U plane control equipment (UPE)#1(42a) (step S1), going through the soft handover requesting between the terminal UE and the Nodes B#2(6b), to the connection of a path between the terminal UE and the Node B#2. The C plane control equipment (CPE)#1 (41a) manages resources of the U plane control equipment #1 and the Node B#1, and the C plane control equipment #2(41b)

manages resources of the U plane control equipment #2(42b) and the Node B#2.

[0037] A soft handover request is notified as "MEASUREMENT REPORT (RRC)" from the terminal UE to the C plane control equipment #1 via the Node B#1 and the U plane control equipment #1 (step S2). The C plane control equipment #1 obtains an IP address for soft handover in regard to the U plane control equipment #1 and notifies the U plane control equipment #1 of the IP address together with "RADIO LINK SETUP REQUEST" (step S3). The U plane control equipment #1 responds to the C plane control equipment #1 by "RADIO LINK SETUP RESPONSE" (step S4).

[0038] Next, the C plane control equipment #1 transmits the IP address of the U plane control equipment #1 obtained for soft handover together with "RADIO LINK SETUP REQUEST (RNSAP)" to the C plane control equipment #2 managing the Node B#2 as a moving destination (step S5). The C plane control equipment #2 transmits the IP address of the U plane control equipment #1 obtained for soft handover together with "RADIO LINK SETUP REQUEST (NBAP)" to the Node B#2 (step S6).

[0039] The Node B#2 notifies the C plane control equipment #2 of an IP address of the Nodes B#2 together with "RADIO LINK SETUP RESPONSE (NBAP)" (step S7). Next, the C plane control equipment #2 notifies the C plane control equipment #1 of the IP address of the Node B#2 together with "RADIO LINK SETUP RESPONSE (RNSAP)" (step S8). The C plane control equipment #1 notifies the U plane control equipment #1 of the IP address of the Node B#2 by "RADIO LINK SETUP INDICATION" (step S9).

[0040] By these procedures, the IP address of the Node B#2 is notified to the U plane control equipment #1, and the IP address of the U plane control equipment #1 is notified to the Node B#2, thereby allowing the transmission/reception of user data. At the same time, the C plane control equipment #1 notifies the terminal UE of "ACTIVE SET UPDATE (RRC)" (step S10). Then, the terminal UE notifies the C plane control equipment #1 of "ACTIVE SET UPDATE COMPLETE (RRC)" (step S11) after which radio synchronization is started between the terminal UE and the Node B#2 (step 12).

[0041] After the layer 1 (L1) synchronization for the radio line between the terminal UE and the Node B#2 is completed, "RADIO LINK RESTORE INDICATION (NBAP)" is notified from the Node B#2 to the C plane control equipment #2 (step S13). The C plane control equipment #2 transmits "RADIO LINK RESTORE INDICATION (RNSAP)" to the C plane control equipment #1 (step S14), after which the path is completely established between the terminal UE and the Node B#2. Consequently, paths for soft handover connected to one U plane control equipment #1 from the Nodes B#1 and #2 are established (step S15).

[0042] Thus, in the case of soft handover across RNCs, by connecting paths from one U plane control

equipment to a plurality of Nodes B without establishing a path between a drift RNC and a serving RNC for user data, soft handover may be achieved, which enables the continuous use of the same U plane control equipment and thus eliminates the path between RNCs, thereby leading to effective utilization of resources and preventing delay due to passing through the RNCs.

[0043] Next, a conceivable modification is such that the RNC is separated into the C plane control equipment and the U plane control equipment and that the U plane control equipment is incorporated into the Node B. In this case, if the U plane control equipment incorporated into the Node B does not have the function of selectively synthesizing user data (the selective synthesis unit 123 in FIG. 1), soft handover via a plurality of Nodes B is not executable. This means unenjoyment of merits of utilizing CDMA within radio zones. It is thus conceivable to provide each Node B with the function of selectively synthesizing user data to realize communication between Nodes B.

[0044] FIG. 5 shows the conventional network configuration and a flow of user data and control signals. In this network configuration, when soft handover is performed involving plural Nodes B6a to 6c, an SRNC (Serving RNC) 4a terminates user data and control signals. When soft handover is performed involving plural RNCs, user data and control signals are transferred from the SRNC 4a to a DRNC (Drift RNC) 4b via an interface lur.

[0045] FIG. 6 shows a network configuration in the case that the RNC is separated into the C plane control equipment 41 and the U plane control equipment 42 and that the U plane control equipments 42a to 42c are incorporated into the Nodes B6a to 6c, respectively. The Nodes B6a to 6c, the C plane control equipment 41, the CN 3 are connected with one another via an IP network 100.

[0046] Next, shown is how soft handover involving plural Nodes B is executed in the IP network shown in FIG. 6. It is assumed here that the C plane control equipment 41 is notified IP addresses of the Nodes B.

[0047] FIG. 7 shows an example of setting a radio link (RL) via two Nodes B from a state in which the terminal UE has no radio link (RL). The C plane control equipment (CPE) selects a Node B (Node B#1 in FIG. 7) as a serving Node from among a plurality of Nodes B (Node B#1 and Node B#2 in FIG. 7) (step S20). The C plane control equipment notifies both the Nodes B of an IP address of the serving Node B (Node B#1 in FIG. 7) and an IP address of the other Node B (Node #2 in FIG. 7) so as to indicate the difference of the IP addresses therebetween by means of "RADIO LINK SETUP REQUEST" message (steps S21 and S22).

[0048] The C plane control equipment designates a Node B controlling cells of the highest quality as a serving Node B. Both the Nodes B compare their own IP addresses to the IP address of the serving Node B, and when such own IP address is the same as that of the

serving Node B, the Node B having the same IP address recognizes itself as the serving Node B (step S22). Nodes B other than that recognize the IP address of the serving Node B as a transfer destination for UL (Up Link) data (step S24).

[0049] Each Node B secures resources necessary for setting up a radio link, and then returns "RADIO LINK SETUP RESPONSE" message to the C plane control equipment (steps S25 and S26), thereafter establishing the synchronization of the U plane (step S27).

[0050] In the case of DL (Down Link) data transfer (step S28), the serving Node B transfers data to the IP address of the other Node B notified in the "RADIO LINK SETUP REQUEST" message (step S29). In the case of UP (Up Link) data transfer, the serving Node B compares data received from each Node B with one another and transfers data of the highest quality to the host (step S30).

[0051] FIG. 8 shows an example from a state that the mobile unit already has a radio link to a state that the mobile unit comes into soft handover condition by adding a radio link via a new Node B. In this case, the Node B having a radio link already set up (Node B#2 in FIG. 8) (step S31) needs to be notified of an IP address of a serving Node B and IP addresses of Nodes B involved in soft handover.

[0052] First, a radio link is setup (step S34) for a new Node B (Node B#1 in FIG. 8) by means of "RADIO LINK SETUP REQUEST" message (step S32) and "RADIO LINK SETUP RESPONSE" message (step S33), and then all the Nodes B involved in soft handover are notified of the IP address of the serving Node B and IP addresses of Nodes B involved in soft handover.

[0053] As means for the above, a new message of "SOFT HANDOVER INDICATION" should be proposed (steps S36 and S37). This message includes the IP address of the serving Node B and IP addresses of Nodes B involved in soft handover. Operations thereafter is the same as those in FIG. 7, so are indicated with the same reference numerals and characters.

[0054] FIGS. 7 and 8 show examples of soft handover involving two Nodes B, however, two or more Nodes B involved in soft handover are also applicable to the above mechanism. In this case, plural IP addresses are set as "OTHER NODE B IP ADDRESS" in steps 21 and 22 of FIG. 7 and in steps 36 and 37 of FIG. 8.

[0055] FIG. 9 shows a flow of user data and control signals in the IP network 100. FIG. 9 corresponds to the sequences in FIGS. 7 and 8.

[0056] The example of providing selective synthesis function to each Node B is described above, although such installation of the selective synthesis function to the Node B raises a problem of increasing the production cost of the Node B. To solve the problem, it is conceivable to provide the selective synthesis function to only one Node B out of plural Nodes B. In this case, user data is terminated in the Node B having such selective synthesis function at the time of soft handover via plural

Nodes B. This may result in maintained soft handover function which is an advantageous feature of CDMA.

[0057] FIG. 10 shows a flow of user data and control signals in the IP network 100 in the case that the Node B#1 and the Node B#2 are involved in soft handover but neither of them has the selective synthesis function. In FIG. 10, a Node B#3 (6c) has the selective synthesis function.

[0058] To realize such processing, the CN 3 is necessary to have IP addresses, locations, the presence of the selective synthesis function, load status, and the like, of all Nodes B within the IP network 100. In the example of FIG. 10, the CN 3 notifies the Nodes B#1 and #2 of an IP address of a serving Node B, and the Nodes B#1 and #2 transfer data to the serving Node B. The CN 3 also instructs the Nodes B#3 to function as a serving.

[0059] When selecting the serving Node B from Nodes B other than those involved in soft handover, the CN 3 takes account of physical distances between the Nodes B involved in soft handover and the Node B working as the serving Node, and load status of the Nodes B targeted for the serving.

[0060] As described in the above, according to the present invention, a RNC is physically separated into a C plane control equipment as a signaling control unit and a U plane control equipment as a user data processing unit, thus allowing a system abundant in scalability to effectively be constructed. In addition, each unit in the U plane control equipment has no relation with one another, enabling separate installation.

[0061] Furthermore, even in the case of soft handover across the C plane control equipments, the same U plane control equipment may be continuously utilized, which eliminates the conventional path between RNCs and thus effectively prevents delay due to passing through the RNCs.

[0062] Moreover, even in the case that the Node B has the function of terminating user data which is performed in the present RNC and that such Node B is connected to an IP network, by providing a selective synthesis function for user data to a predetermined Node B, soft handover involving a plurality of Nodes B may effectively be achieved.

#### Claims

1. A radio access network apparatus provided between a mobile terminal and a host device having an switching network in a mobile communication system and connected to the mobile terminal via a radio interface, the radio access network apparatus comprising:

user plane controlling means for controlling transfer of user data in relation to the mobile terminal;  
control plane controlling means for controlling

transfer of signaling having a control signal,

wherein the user plane controlling means and the control plane controlling means are physically separated from each other.

2. The radio access network apparatus according to Claim 1, wherein the user plane controlling means has a function of terminating a data link layer of a protocol of the radio interface, and the control plane controlling means has a function of terminating a network layer of a protocol of the radio interface.
3. The radio access network apparatus according to Claim 1 or 2, wherein the user data is transferred between the mobile terminal and the host device via the data link layer of the user plane controlling means, and the signaling is transferred via the data link layer of the user plane controlling means and the network layer of the control plane controlling means.
4. The radio access network apparatus according to Claim 1, 2, or 3, further comprising:  
a radio base station having a function of terminating a physical layer of a protocol of the radio interface.
5. The radio access network apparatus according to one of Claims 1 to 4, wherein the user plane controlling means further includes means for selecting data of high receiving quality from among the user data coming from a plurality of the radio base stations involved in soft handover state and sending out the selected data to the host device.
6. The radio access network apparatus according to one of Claims 1 to 5, wherein the user plane controlling means is incorporated into the radio base station.
7. The radio access network apparatus according to one of Claims 1 to 6, wherein the mobile communication system is a W-CDMA cellular system.
8. A mobile communication system including a mobile terminal, a host device having an exchange network, and a radio access network apparatus provided between the mobile terminal and the host device and connected to the mobile terminal via a radio interface, wherein the radio access network apparatus comprises:  
user plane controlling means for controlling transfer of user data in relation to the mobile terminal, and control plane controlling means for controlling transfer of signaling having a

control signal, the user plane controlling means and the control plane controlling means being physically separated from each other.

9. The mobile communication system according to Claim 8, wherein the user plane controlling means has a function of terminating a data link layer of a protocol of the radio interface, and the control plane controlling means has a function of terminating a network layer of a protocol of the radio interface.
10. The mobile communication system according to Claim 8 or 9, wherein the user data is transferred in a controlled manner between the mobile terminal and the host device via the data link layer of the user plane controlling means, and the signaling is transferred in a controlled manner via the data link layer of the user plane controlling means and the network layer of the control plane controlling means.
11. The mobile communication system according to one of Claims 8 to 10, wherein the radio access network apparatus further comprises a radio base station having a function of terminating a physical layer of a protocol of the radio interface.
12. The mobile communication system according to Claim 11, wherein the user plane controlling means further includes means for selecting data of high receiving quality from among the user data coming from a plurality of the radio base stations involved in soft handover state and sending out the selected data to the host device.
13. The mobile communication system according to Claim 11, wherein the user plane controlling means is incorporated into the radio base station.
14. The mobile communication system according to Claim 8, which is a W-CDMA cellular system.

FIG. 1

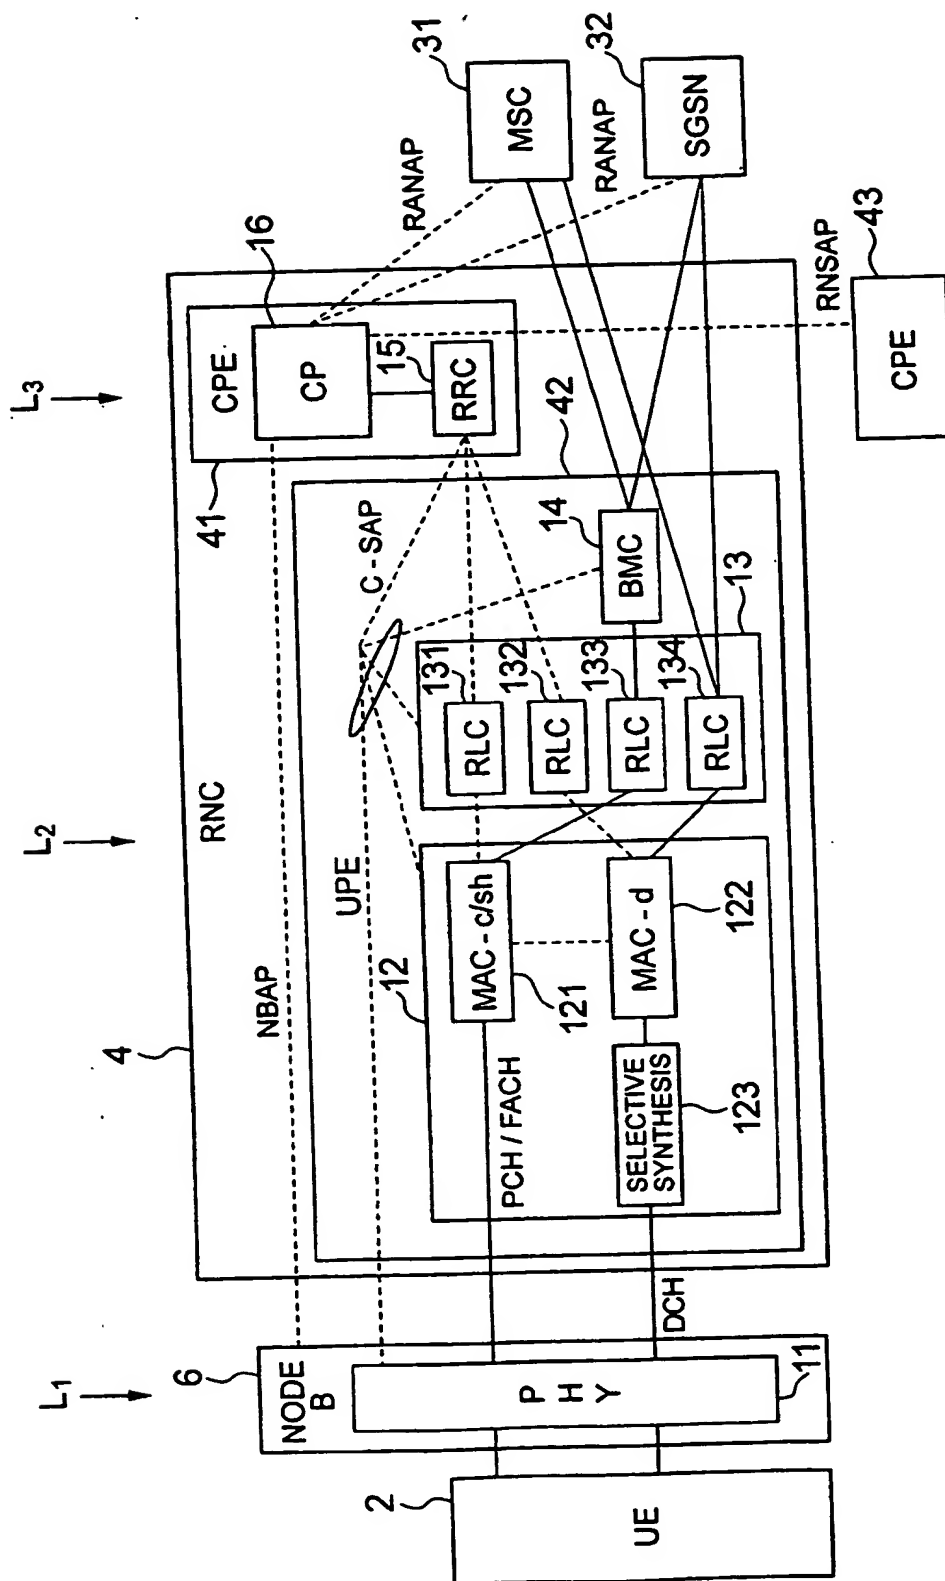




FIG. 2

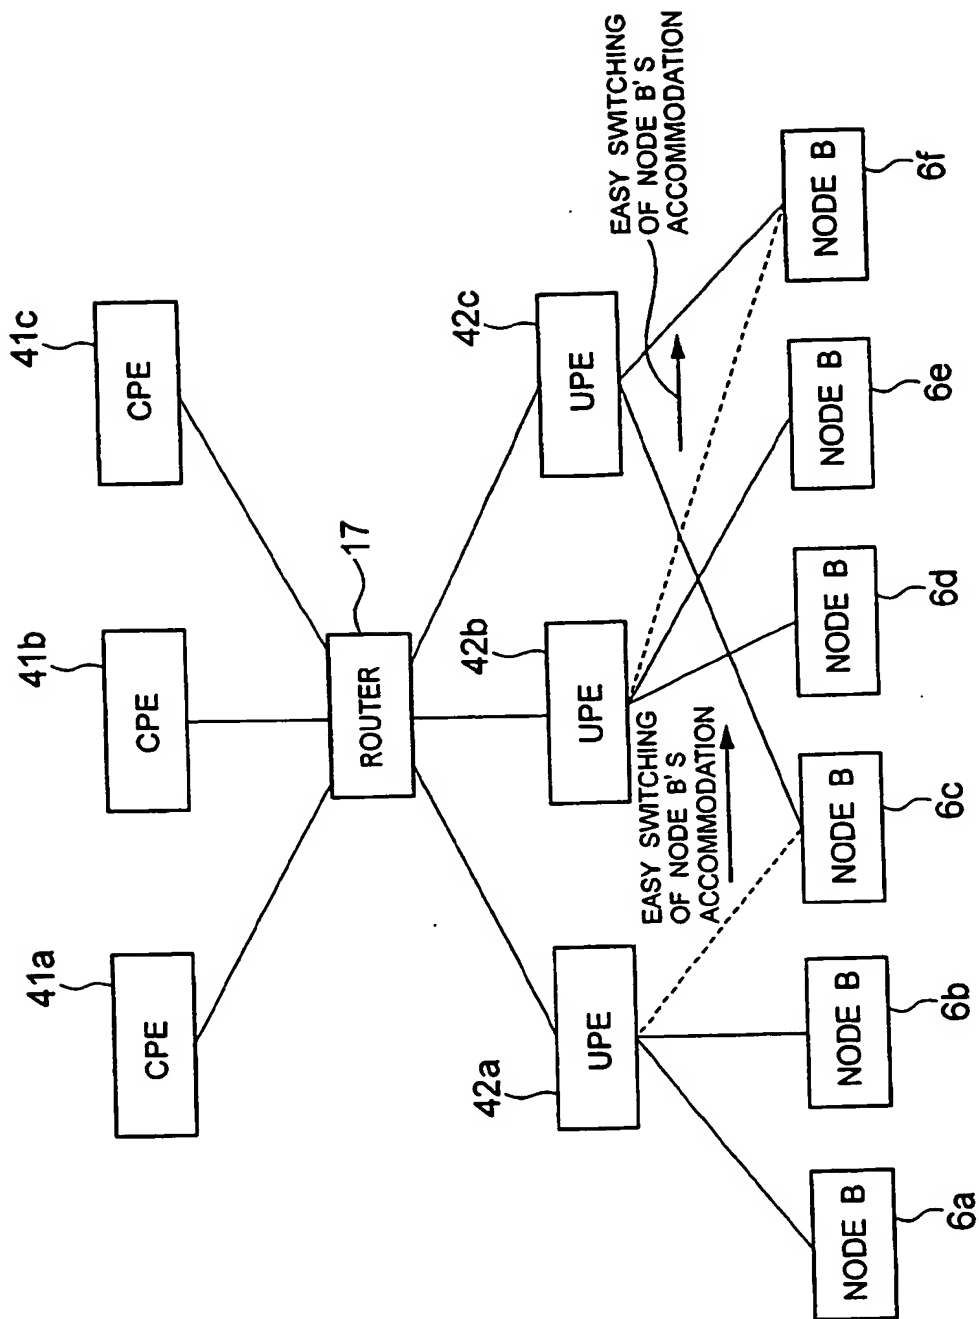


FIG. 3



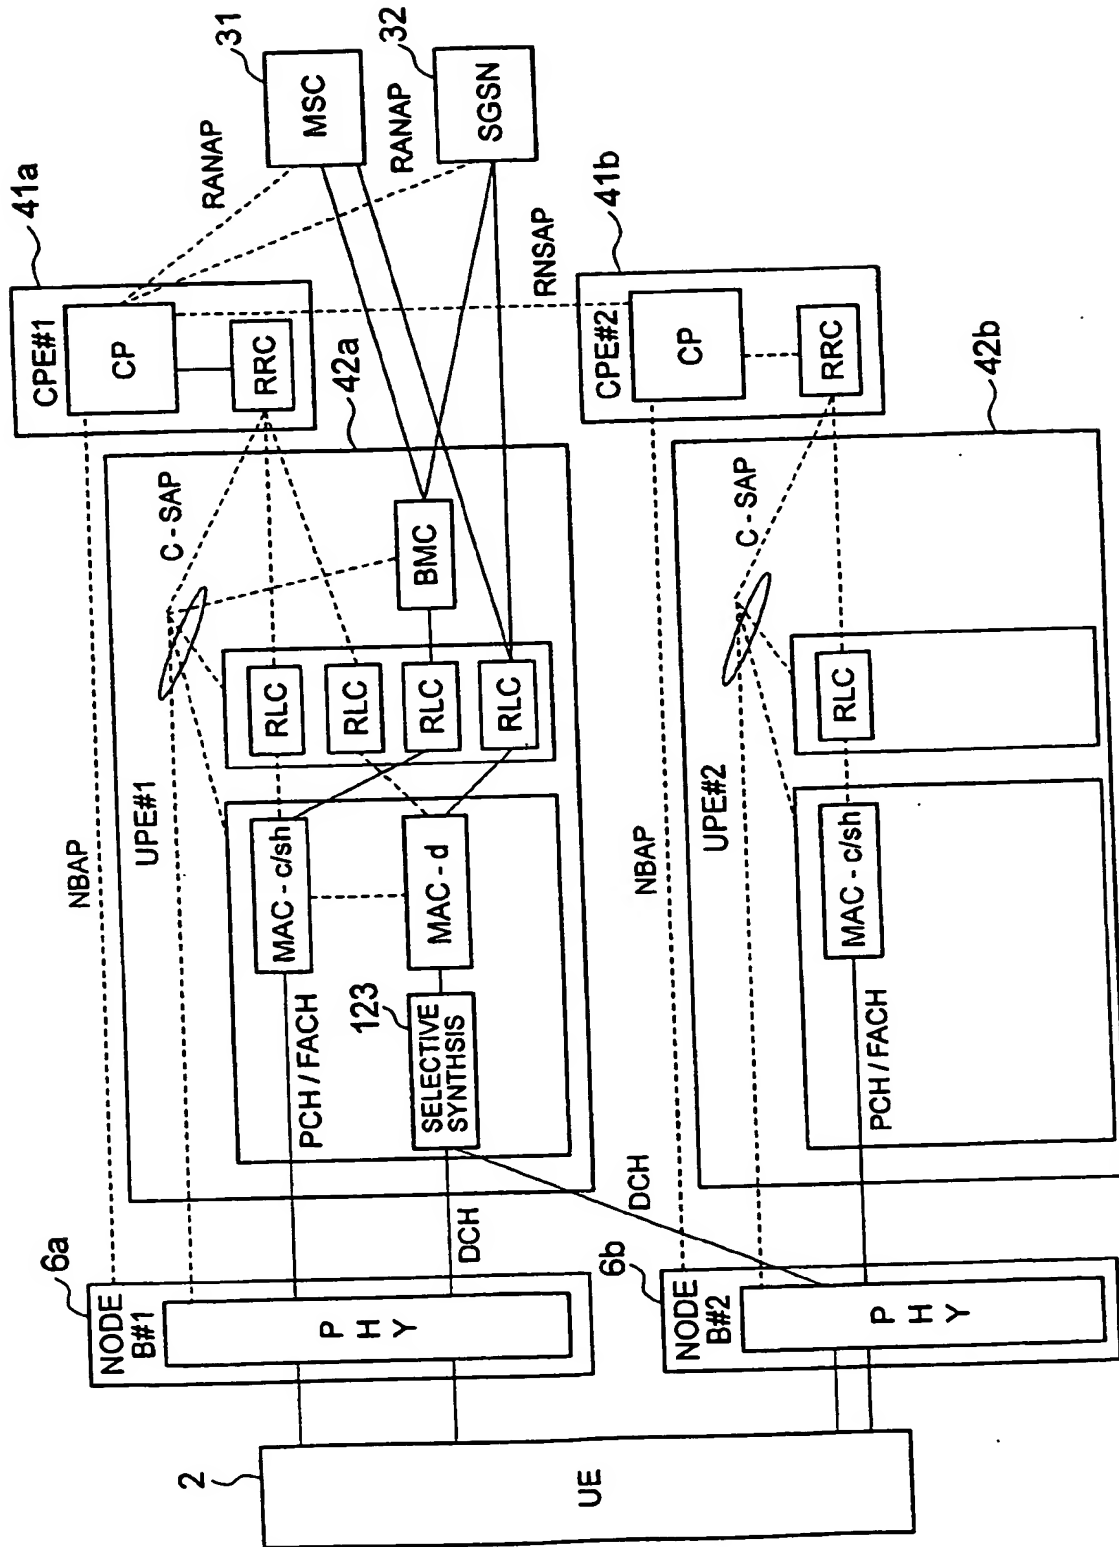


FIG. 4

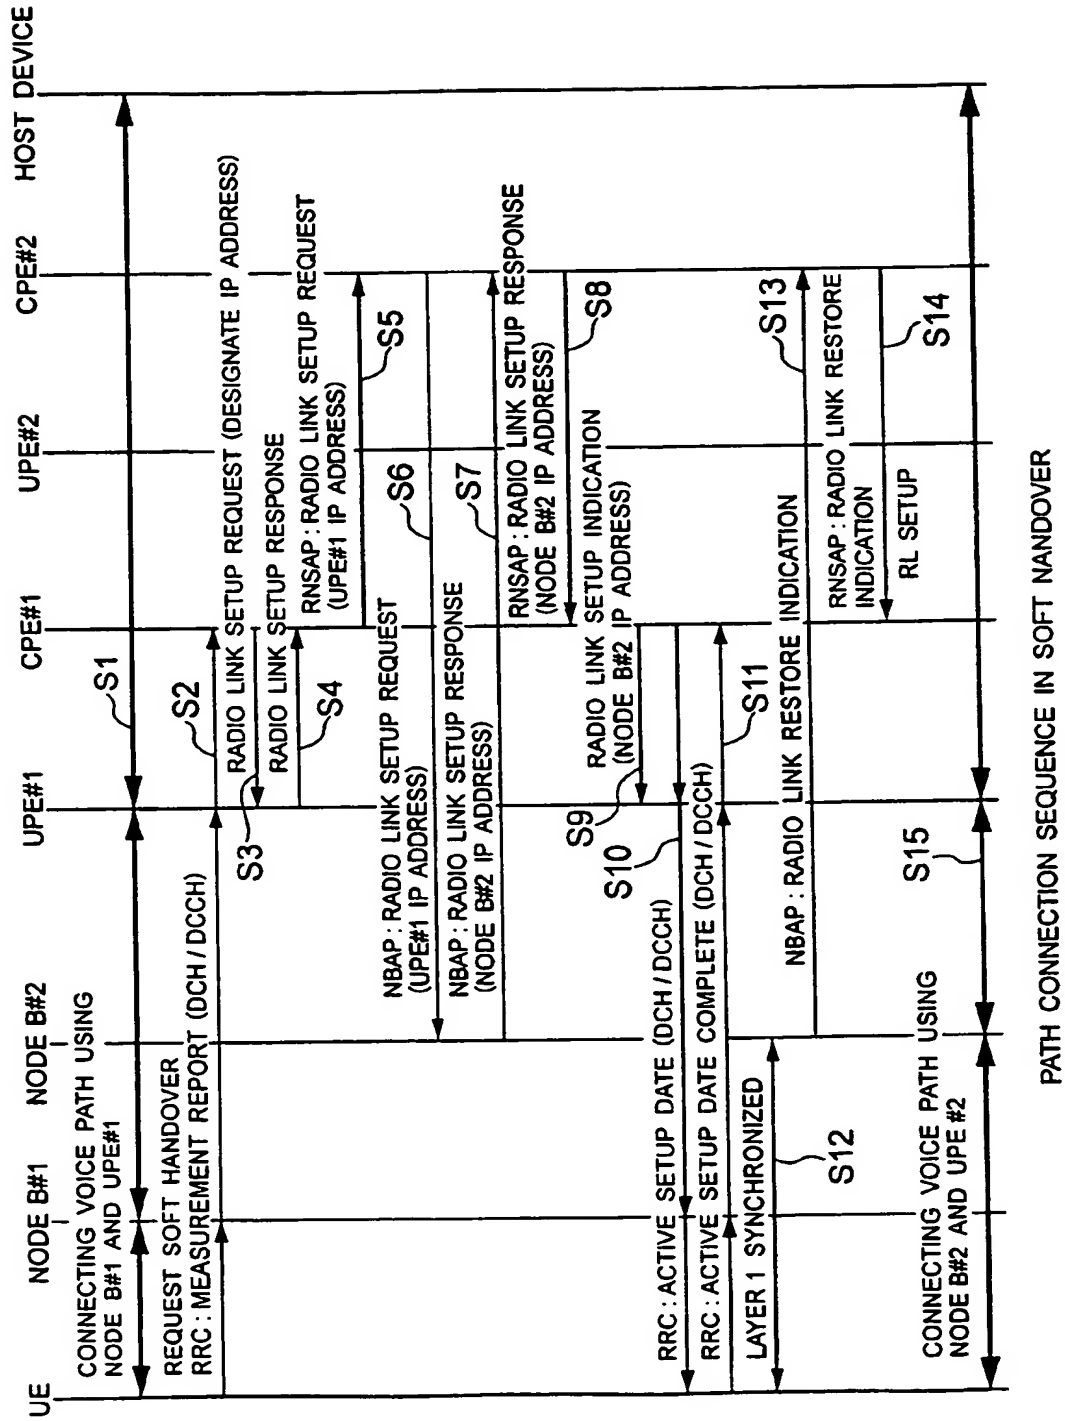


PATH CONNECTION SEQUENCE IN SOFT HANDOVER

FIG. 5

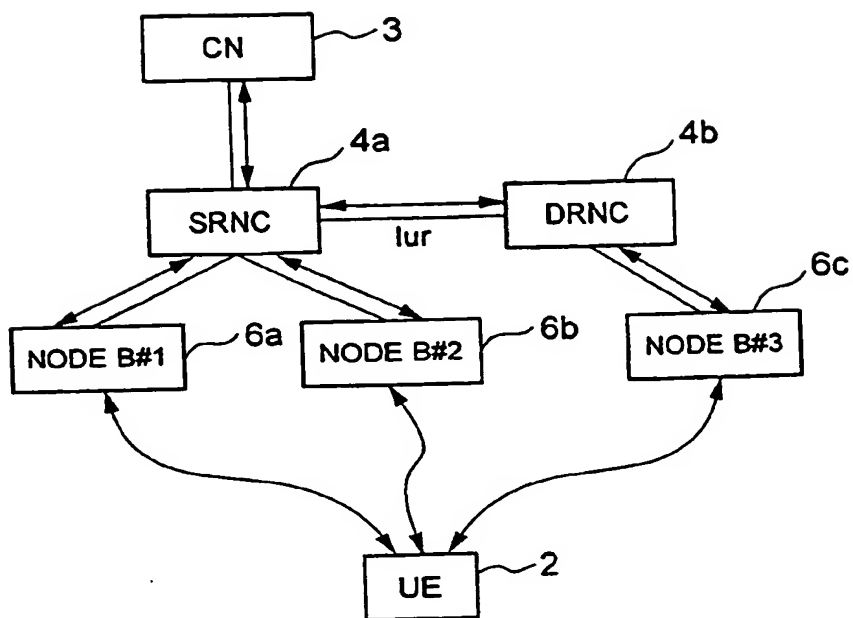

EXISTING NETWORK CONFIGURATION AND FLOW OF USER DATA AND CONTROL SIGNAL

FIG. 6

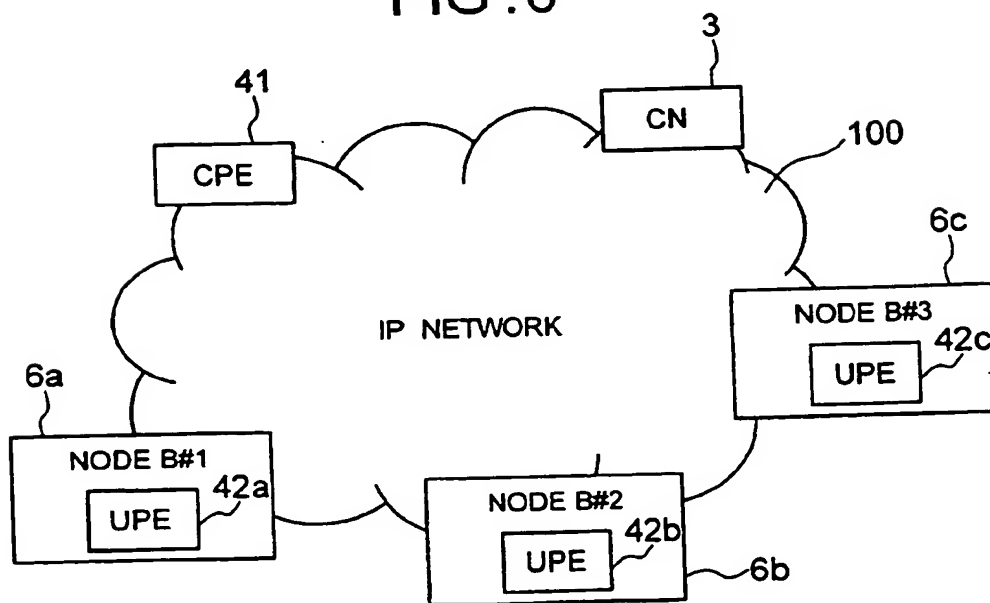

NETWORK CONFIGURATION OF IP NETWORK

FIG. 7

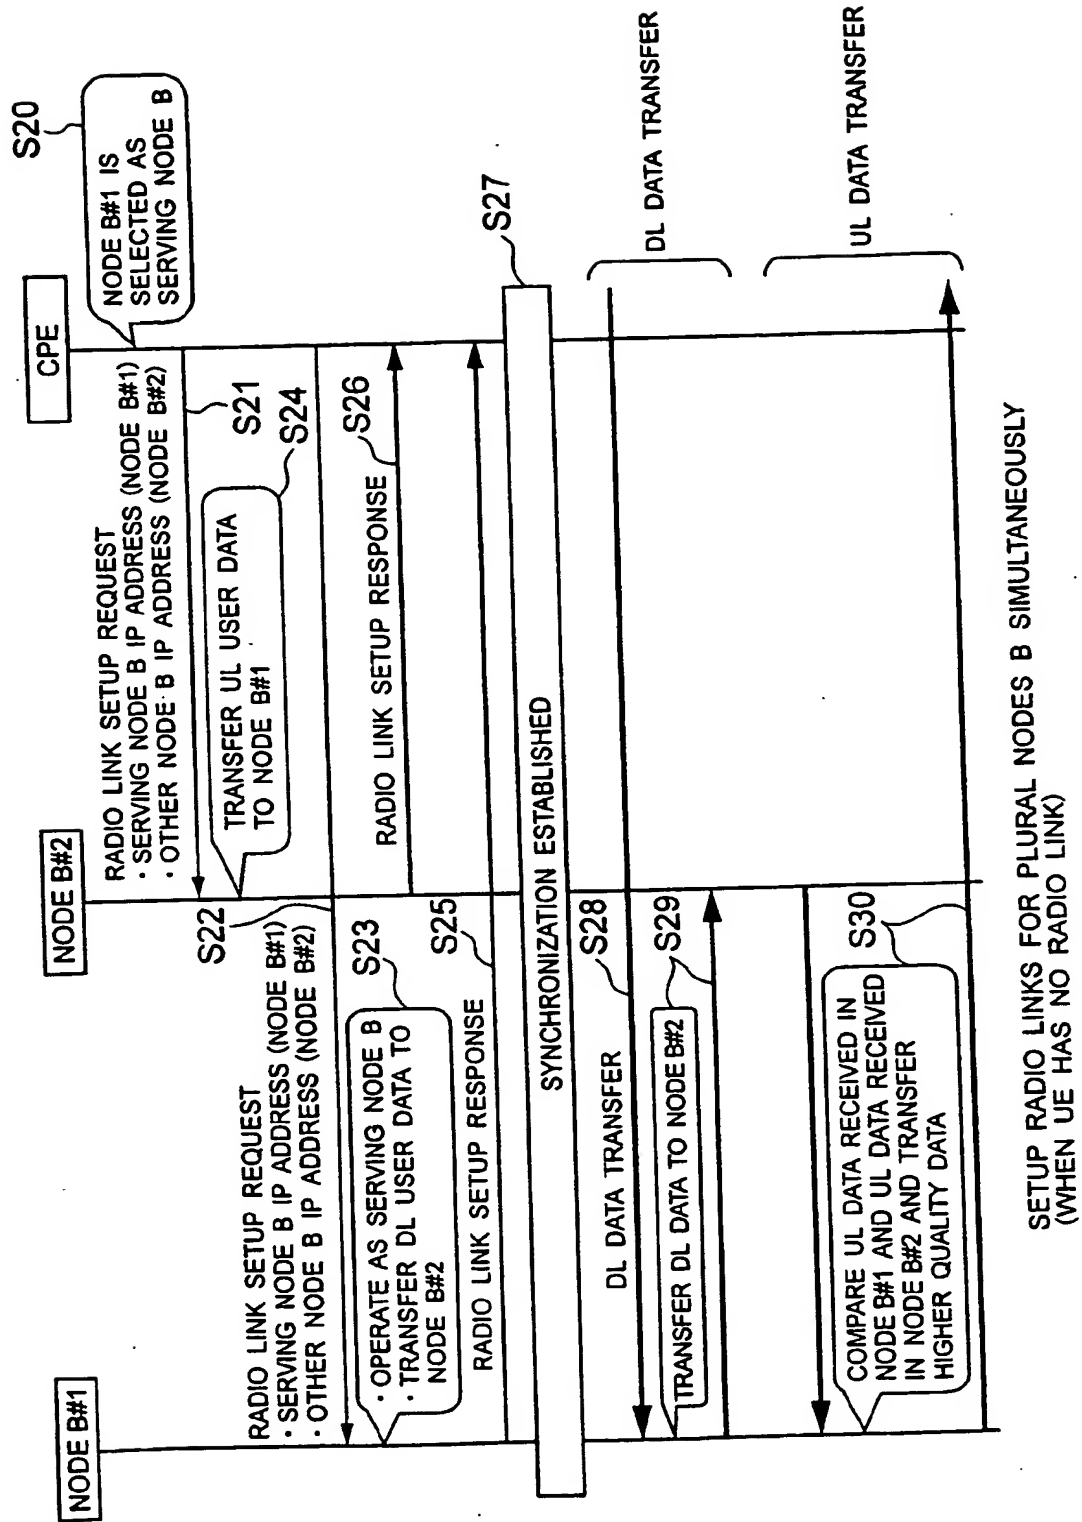


FIG. 8



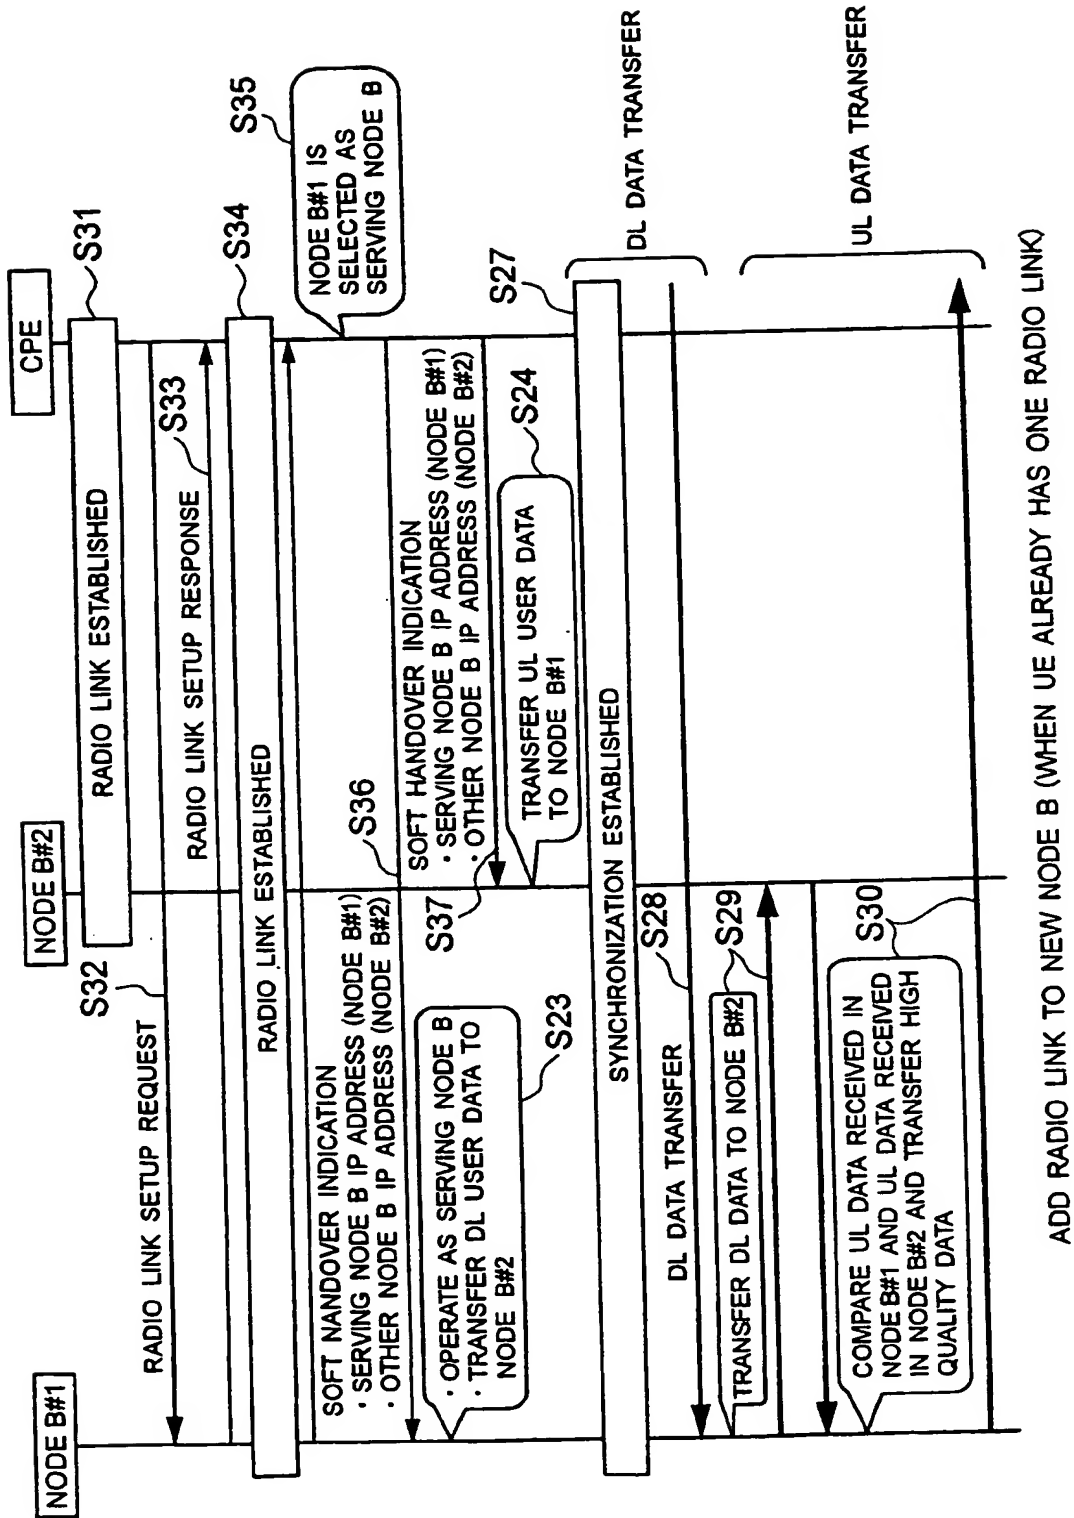


FIG. 9

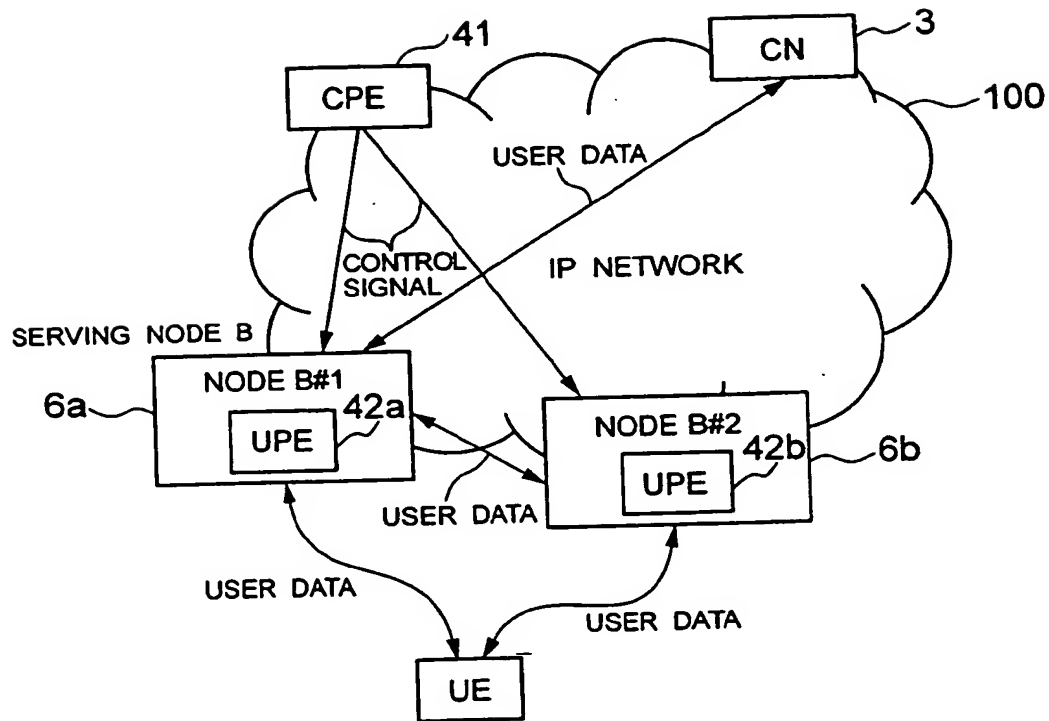

FLOW OF USER DATA AND CONTROL SIGNAL IN IP NETWORK  
(NODE B INVOLVED IN SOFT HANDOVER HAS SELECTIVE  
SYNTHESIS FUNCTION)

FIG. 10

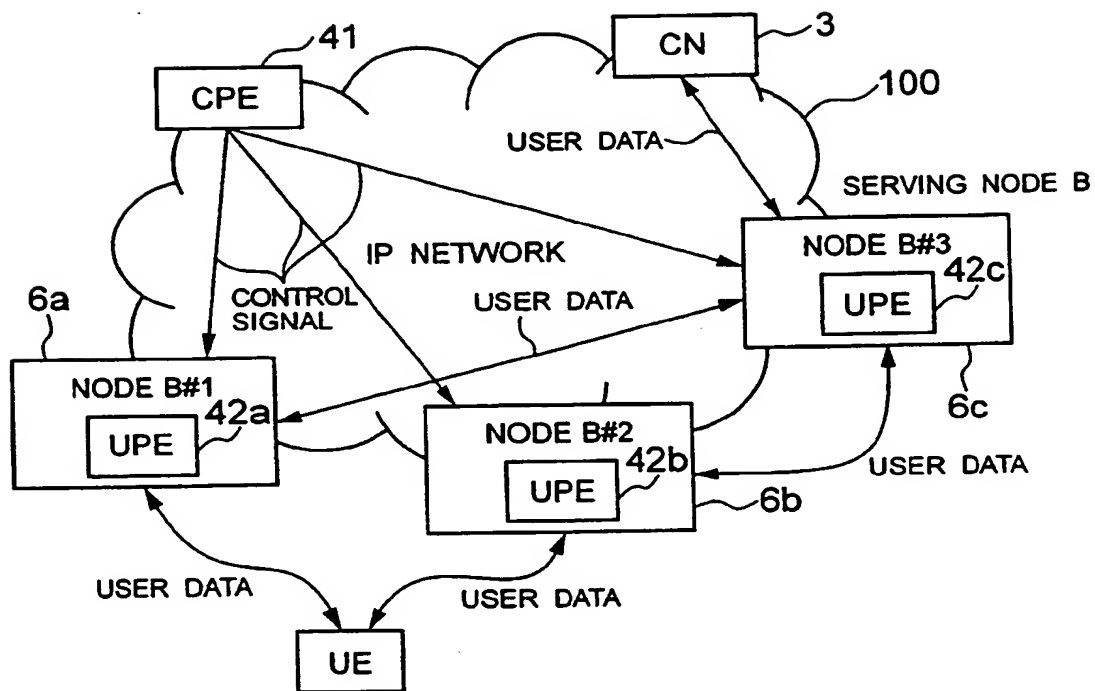

FLOW OF USER DATA AND CONTROL SIGNAL IN IP NETWORK  
(NODE B INVOLVED IN SOFT HANDOVER HAS NO SELECTIVE  
SYNTHESIS FUNCTION)



FIG. 11


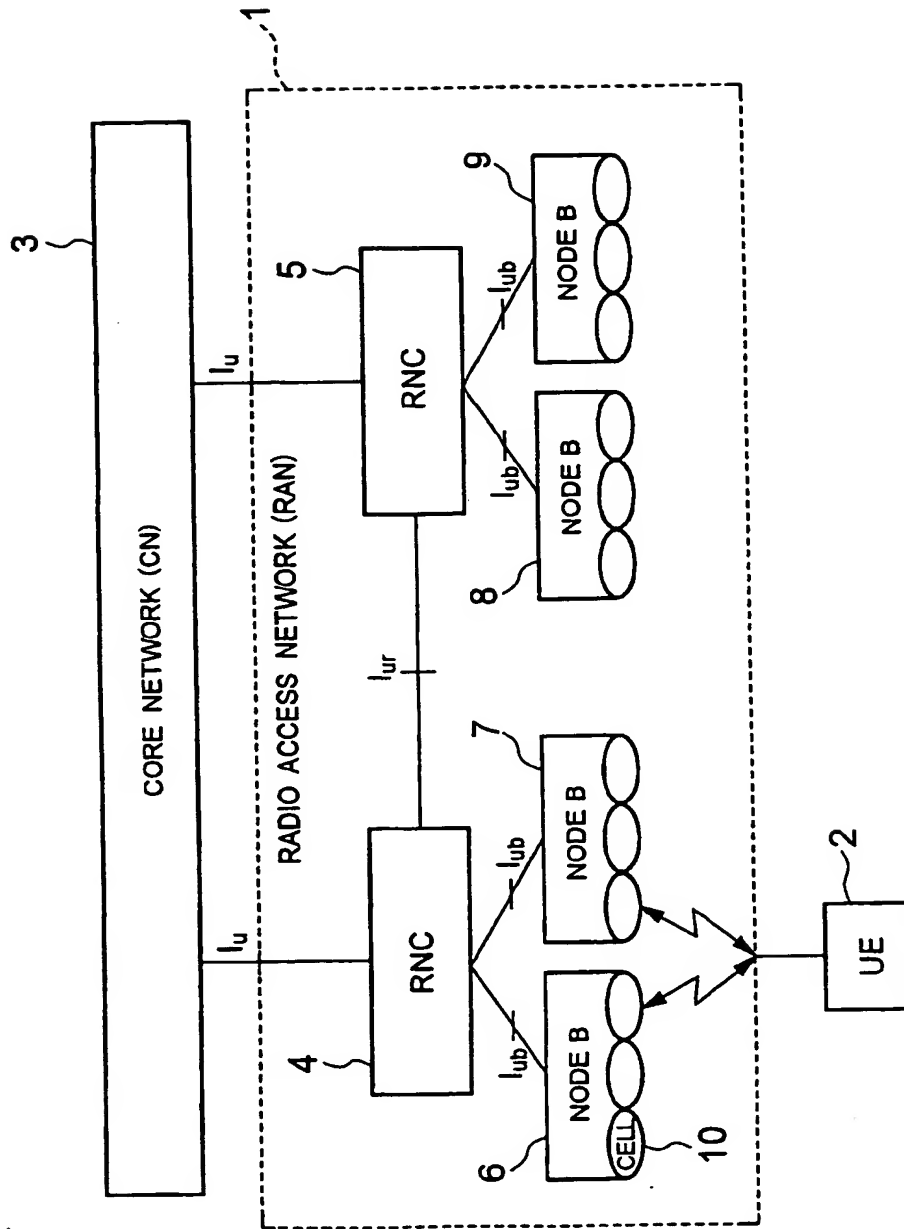


FIG. 12



(19)

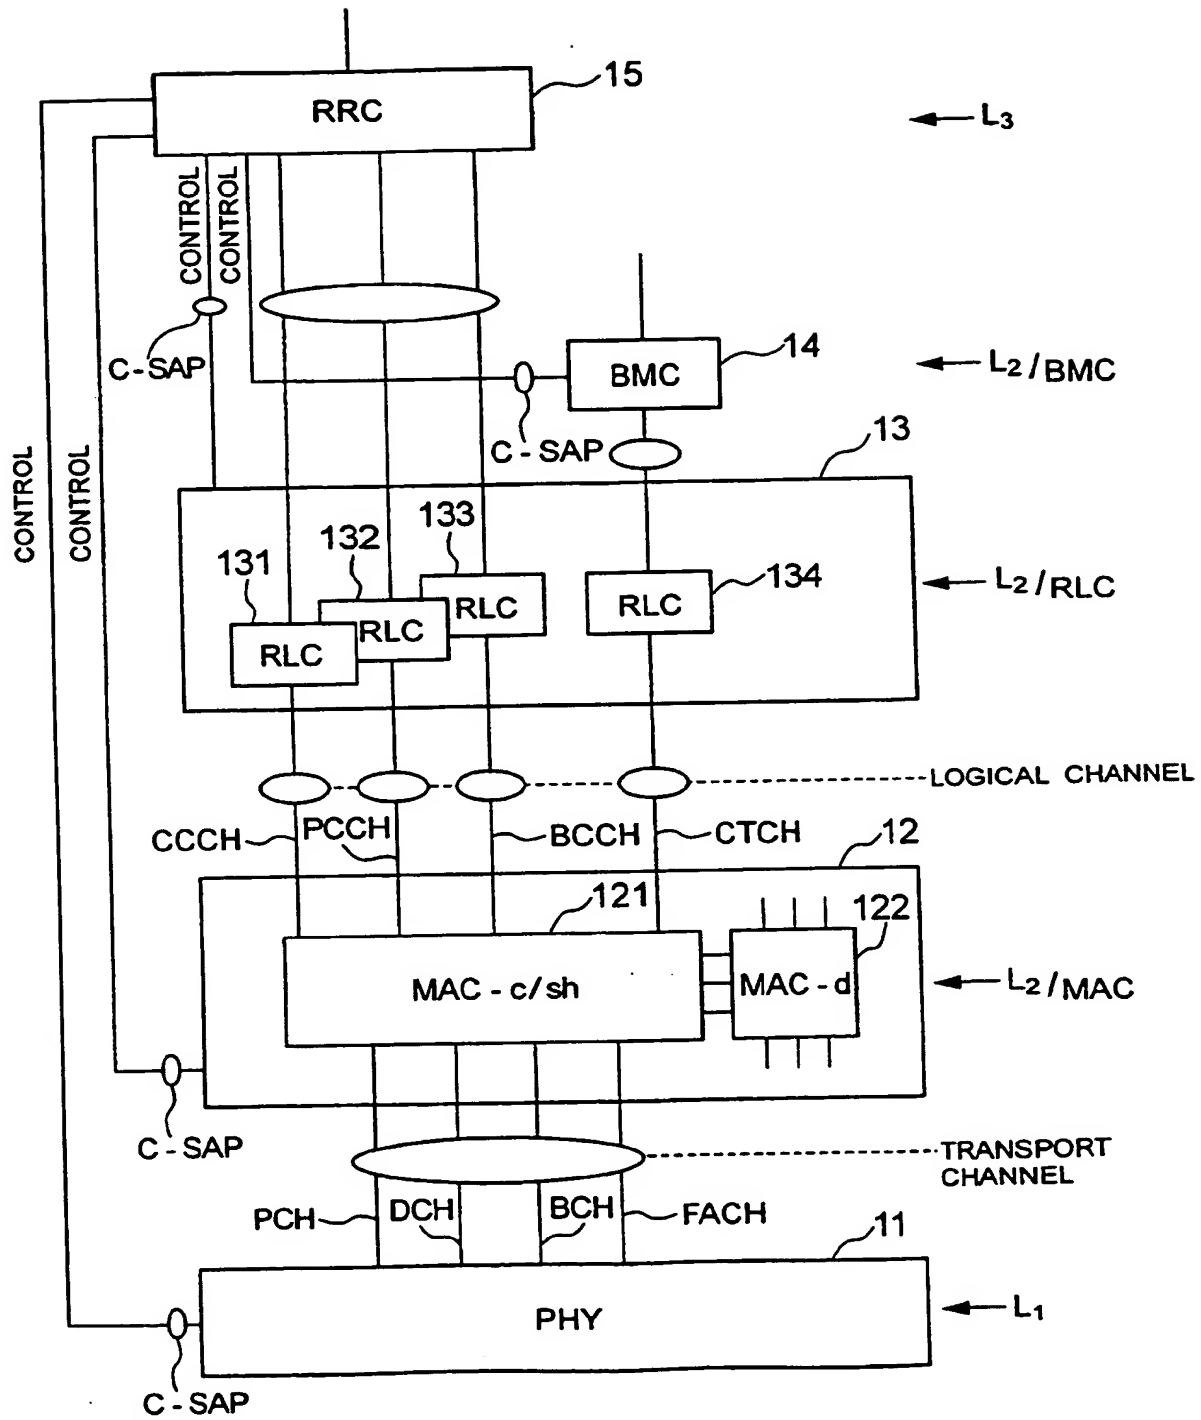

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 367 841 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
10.12.2003 Bulletin 2003/50

(51) Int Cl.7: **H04Q 7/30**

(43) Date of publication A2:  
03.12.2003 Bulletin 2003/49

(21) Application number: **03011357.5**(22) Date of filing: **19.05.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(72) Inventors:  
• **Sakata, Masayuki**  
Tokyo (JP)  
• **Kojima, Masahiko**  
Tokyo (JP)  
• **Itaba, Naoto**  
Tokyo (JP)

(30) Priority: **29.05.2002 JP 2002154889**


(71) Applicant: **NEC CORPORATION**  
Tokyo (JP)

(74) Representative: **Betten & Resch**  
Patentanwälte,  
Theatinerstrasse 8  
80333 München (DE)

(54) **Radio access network apparatus and mobile communication system using the same**

(57) The radio access network for allowing to construct a system abundant in scalability in a W-CDMA mobile communication system. A RNC in the radio access network is physically separated into a C plane control equipment for controlling signaling and a U plane control equipment for processing user data, where the user data is transferred between a mobile terminal and a host device via only the U plane control equipment

and a control signal is terminated by the U plane control equipment and the C plane control equipment. This allows a system abundant in scalability to be constructed, and even in the case of soft handover across the C plane control equipments, also enables the continuous use of the same U plane control equipment, thereby eliminating the conventional connection path for connecting between RNCs and preventing delay due to passing through the RNCs.

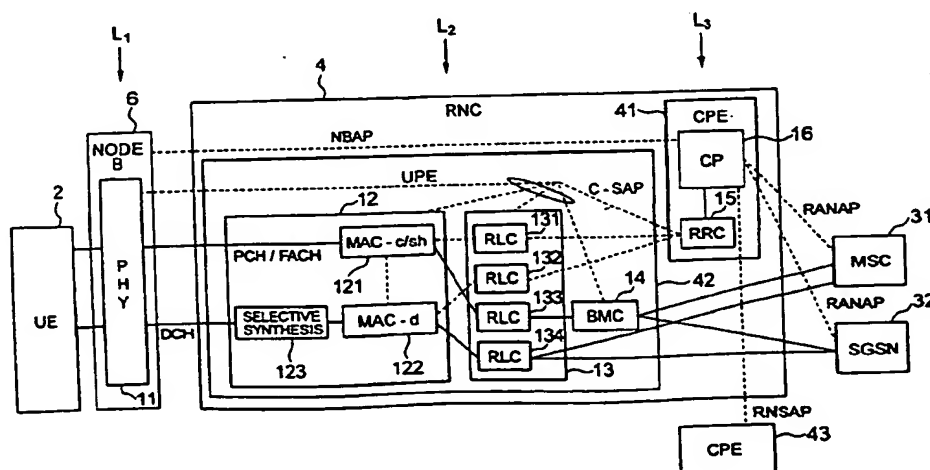**FIG. 1**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 03 01 1357

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 01 58086 A (ERICSSON TELEFON AB L M) 9 August 2001 (2001-08-09) * page 9, line 1 - page 12, line 8 * * page 12, line 14 - line 22 * * page 16, line 12 - page 18, line 17 * * figures 4,5,10,11 * ---	1-14	H04Q7/30
X	"IMT-2000" KRNET 2002 10TH KOREA NETWORK CONFERENCE & EXHIBITION, LG ELECTRONICS, [Online] 22 - 25 May 2002, pages 1-45, XP002256733 Seoul, Korea Retrieved from the Internet: <URL:cnscenter.future.co.kr/resource/rsc-center/presentation/krnet2001/E2-2.pdf > [retrieved on 2003-10-06] * page 39, right-hand column * * page 43 * ---	1-14	
X	MUSIKKA N ET AL: "ERICSSON'S IP-BASED BSS AND RADIO NETWORK SERVER" ON - ERICSSON REVIEW, ERICSSON. STOCKHOLM, SE, no. 4, 2000, pages 224-233, XP002901766 ISSN: 0014-0171 * page 233, middle column, line 1 - line 28 * * page 225, left-hand column, line 1 - line 49 * * page 226, right-hand column, line 26 - line 50 * * figure 3 * --- -/--	1-6,8-13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04Q H04L
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 7 October 2003	Examiner Rüschmann, F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P01001)

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 01 1357

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,X	WO 03 007637 A (TELEFONAKTIEBOLAGET L M ERICSSON) 23 January 2003 (2003-01-23) * abstract * * figure 8 * * page 6, line 30 - page 7, line 5 * * page 9, line 29 - page 10, line 16 * -----	1-14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search	Date of completion of the search	Examiner	
MUNICH	7 October 2003	Rüschmann, F	
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EP 1 367 841 A3

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 01 1357

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

07-10-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0158086 A	09-08-2001	AU 3065501 A	14-08-2001
		EP 1252740 A2	30-10-2002
		WO 0158086 A2	09-08-2001
-----			
WO 03007637 4 A		NONE	
-----			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82